


LONG RADIUS-SYSTEMS

All advantages at a glance

- ▶ Can be operated either as a stand-alone solution
- ▶ ...or as part of a fully automatic linked system
- ▶ Lower unit costs thanks to highly effective parts processing
- ▶ Rosler developed and manufactured vibratory drive motor with an efficiency of approx. 90%
- ▶ Durable design, low maintenance
- ▶ Machine concept also suitable for start-ups

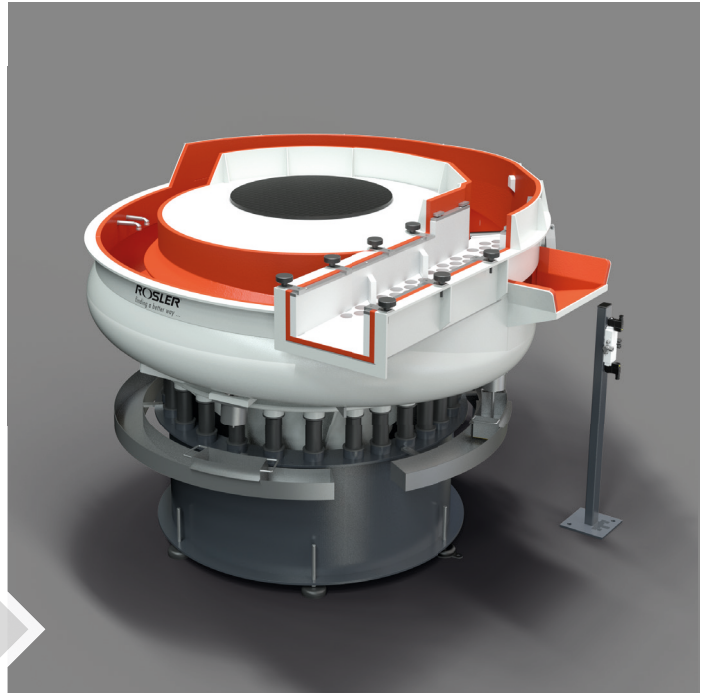

Model	R 250/5 LR	R 310/5 LR	R 310/9 LR	R 400/9 LR	R 480/8 LR
Total length of the processing channel (mm)	5,200	5,000	9,200	8,500	8,000
Machine width (mm)	2,075	2,075	3,430	3,055	3,300
Input height processing channel (mm)	1,150	1,185	1,380	1,480	1,450
Total height (mm)	1,340	1,355	1,780	1,850	1,675
Width processing channel (mm)	240	290	320	400	480
Discharge height (mm)	1,100	1,130	1,430	1,510	1,400
Discharge width (mm)	240	320	375	390	480
Machine length (mm)	2,230	2,230	3,510	3,405	3,200
Usable volume in liters	175	300	475	1,000	1,470
Power vibratory drive (kW)	7.5	7.5	7.5	22	22