


# ROTOMATIC-SYSTEMS

## All advantages at a glance

- ▶ Processing of large quantities in a short time
- ▶ Personnel-saving and economical operation
- ▶ Easy integration into existing production lines
- ▶ Different part sizes/weights can be processed
- ▶ High work piece cleanliness thanks to separation and cleaning station
- ▶ Adjustable processing time (from 5 to 20 minutes)

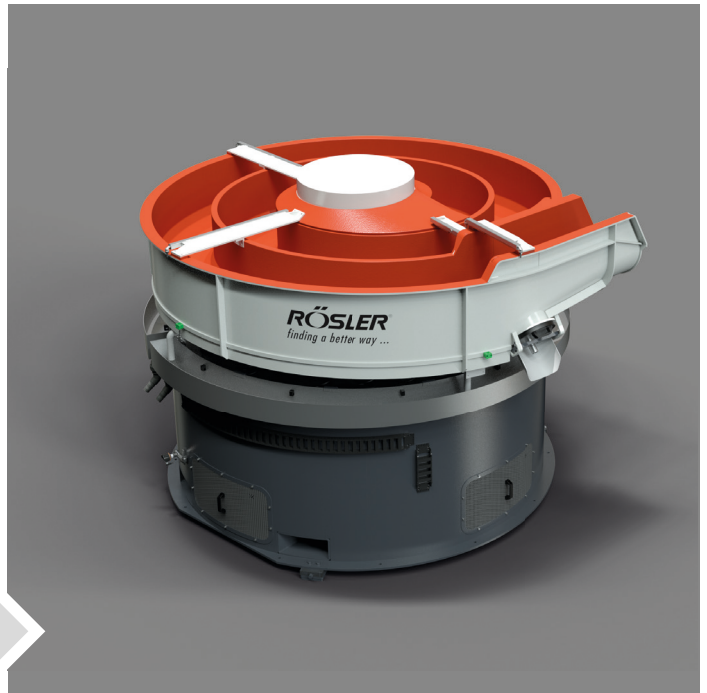

Model	R 150/15 SE	R 200/18 SE	R 210/27 SE	R 280/24 SE	R 370/12 SE
Total length of the processing channel (m)	15	18	27	24	12
Total length (mm)	4,630	5,140	5,690	5,640	5,210
Total width (mm)	2,305	2,800	3,565	3,480	3,190
Total height (mm)	2,170	2,160	2,475	2,510	2,920
Diameter processing channel (mm)	130	185	210	265	370
Height processing channel (mm)	265	315	255	345	435
Discharge height (mm)	1,170	1,045	1,130	950	1,340
Discharge width (mm)	270	380	320	315	950
Input height processing channel (mm)	1,585	1,575	1,890	1,910	2,330
Frame height (mm)	approx. 950	approx. 950	approx. 1,150	approx. 1,050	approx. 950
Total installed power (kW)	17	17	17	17	17
Power vibratory drive (kW)	12.5	12.5	12.5	12.5	12.5